

SOIL SAMPLING

Hand Augers

STANDARDS: ASTM D 420, D 1452 / CNR aVI n° 25  
AASHTOT86,T202  
Designed for soil investigations and explorations.  
Complete with "T" handle.  
Made of special galvanized steel.



MODELS:

	Weight kg
<b>S092 KIT</b> Hand Auger; 80 mm dia. x 1 m long	4
<b>S093 KIT</b> Hand Auger; 100 mm dia. x 1 m long	5
<b>S094 KIT</b> Hand Auger; 150 mm dia. x 1 m long	6
<b>S095</b> Extension rod for above 1 m long complete with coupling device	2

Auger power head to obtain disturbed soil samples.


Supplied "without" augers, to be ordered separately (see accessories).

MODELS:

S096

Auger power head

Motor capacity 2 HP; two strokes, without speed inverter.  
Fitted with two handwheels, to be used just by one operator.  
Drilling holes up to dia. 200 mm and max. depth of 1000 mm  
It does not accept extension rods.  
Weight: 10 kg

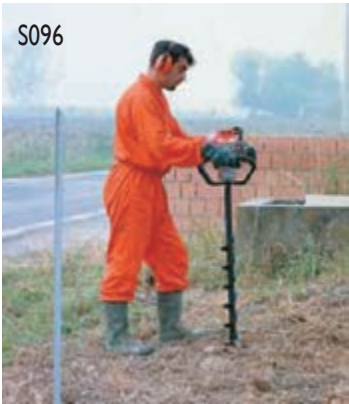

S097

Auger power head

Motor capacity 6 HP; two strokes, equipped "with speed inverter" to facilitate the extraction of the augers.  
Fitted with two handwheels, to be used by two operators.  
Weight: 30 kg

ACCESSORIES:

- S097-01** Auger 60 mm dia. x 1 m long
- S097-02** Auger 80 mm dia. x 1 m long
- S097-03** Auger 100 mm dia. x 1 m long
- S097-04** Auger 150 mm dia. x 1 m long
- S097-05** Auger 200 mm dia. x 1 m long

